

GLOSSY SERIES

300x600mm



1092 LT



1092 HL_3



1092 HL 4



1092 LT

GLOSSY SERIES

300x600mm




1103_LT



1103_HL_3



1103_HL_4

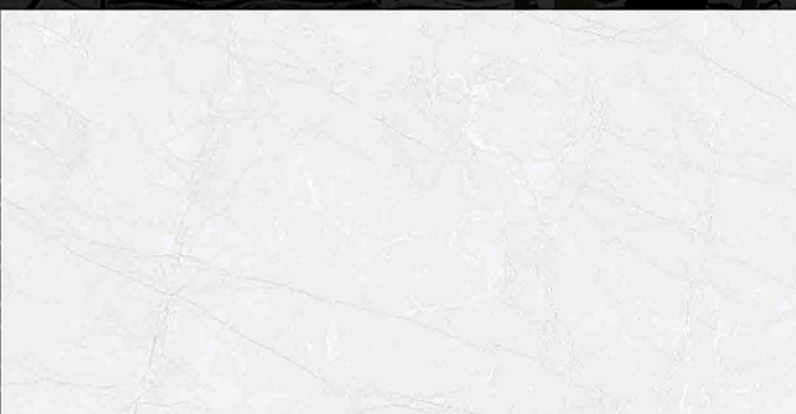

1103_LT

GLOSSY SERIES

300x600mm



1104_LT



1104_HL_3



1104_HL_4



1104_LT

GLOSSY SERIES

300x600mm



1104_LT



1104_HL_5



1104_HL_6



1104_LT

GLOSSY SERIES

300x600mm




1108_LT



1108_HL_2




1108_HL_3

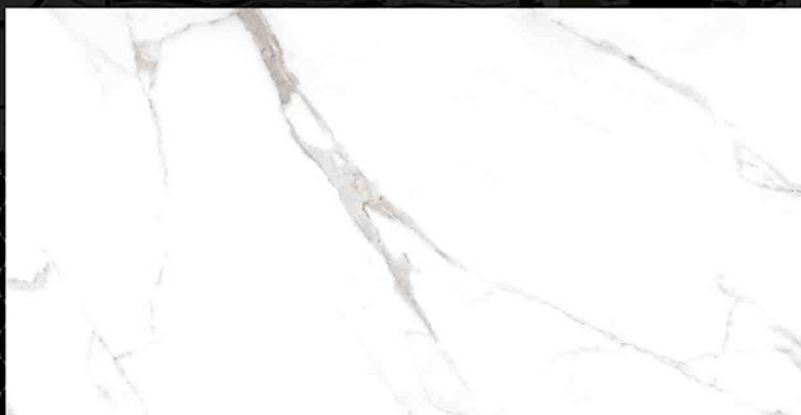

1108_LT

GLOSSY SERIES

300x600mm

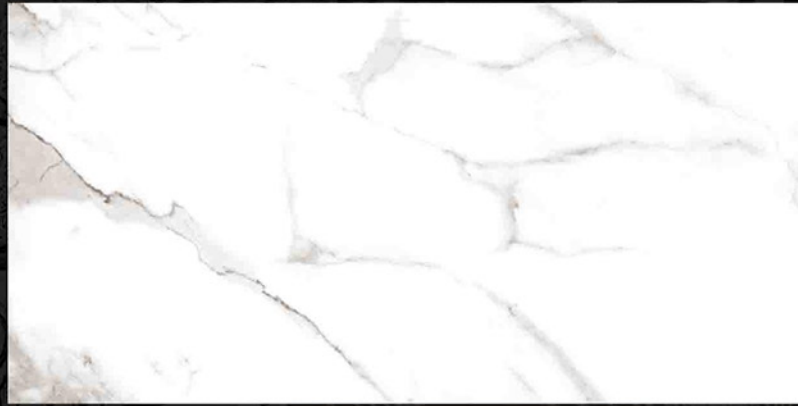


1108_LT



1108_HL_4




1108_HL_5

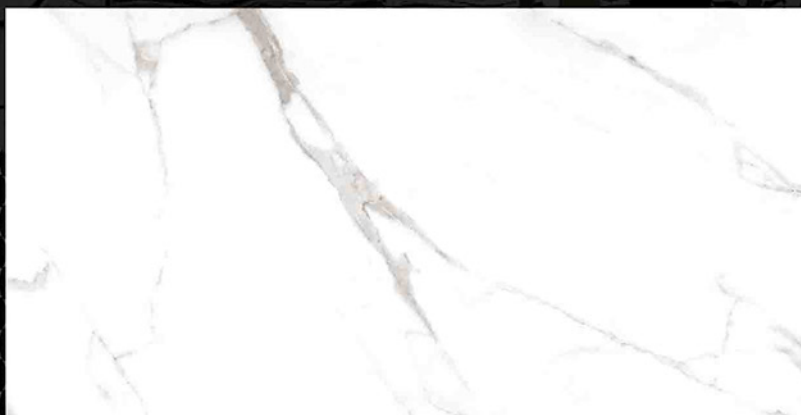

1108_LT

GLOSSY SERIES


300x600mm

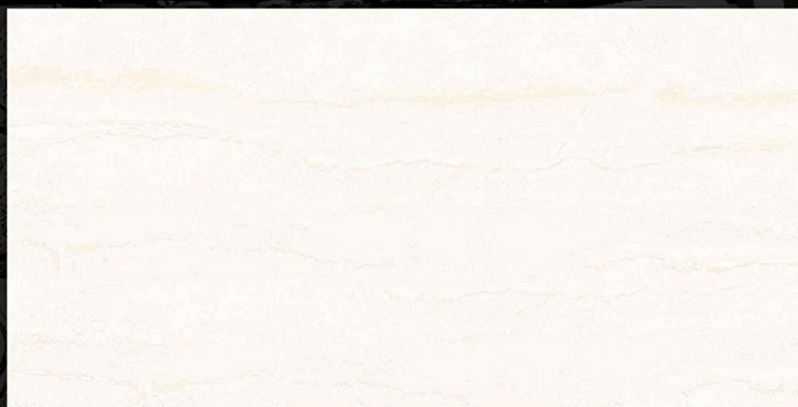

1110_LT



1110_HL_2

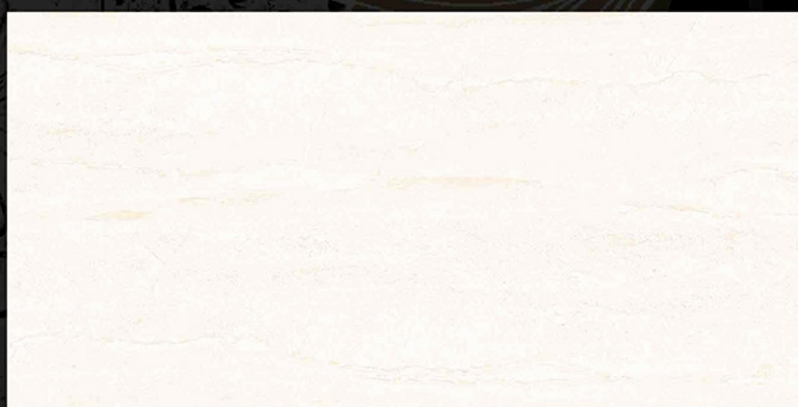

1110_LT

GLOSSY SERIES

300x600mm



K_110_LT



K_110_HL_1




K_110_HL_2




K_110_LT

GLOSSY SERIES

300x600mm

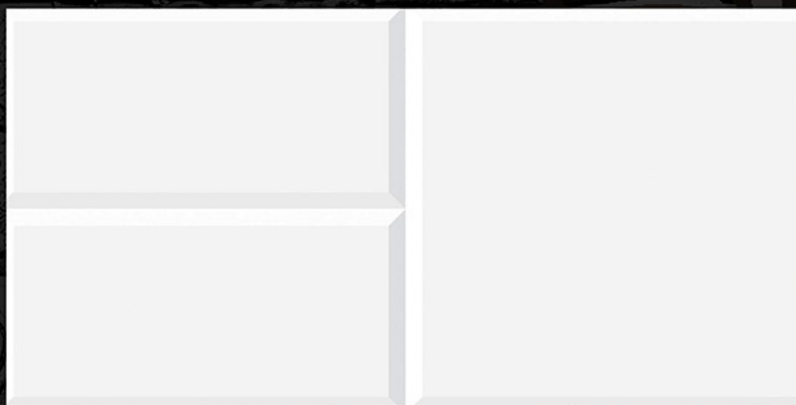


K_111_LT

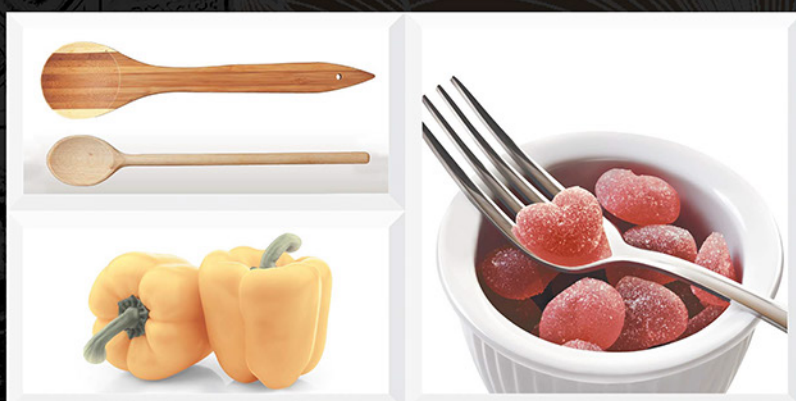

K_111_HL_1




K_111_HL_2

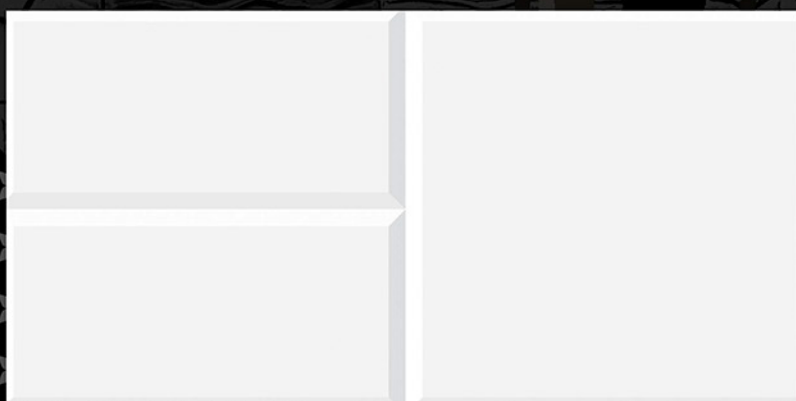


K_111_LT

GLOSSY SERIES

300x600mm

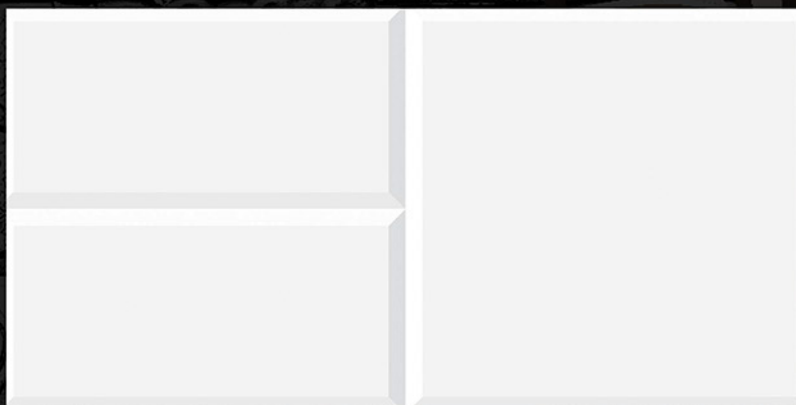


K_111_LT

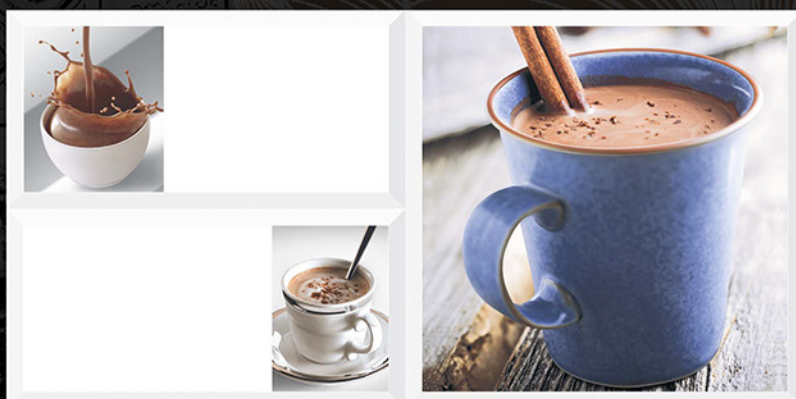

K_111_HL_3




K_111_HL_4

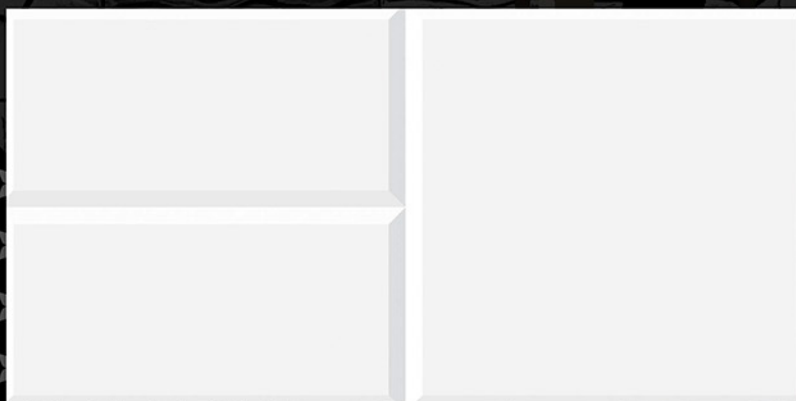

K_111_LT

GLOSSY SERIES


300x600mm

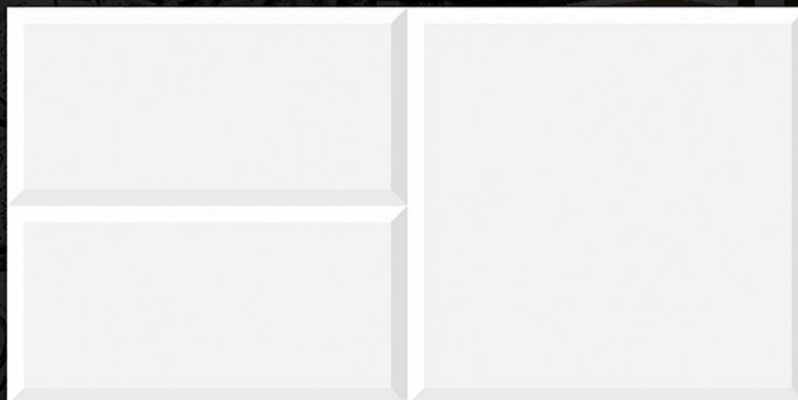

K_111_LT




K_111_HL_5

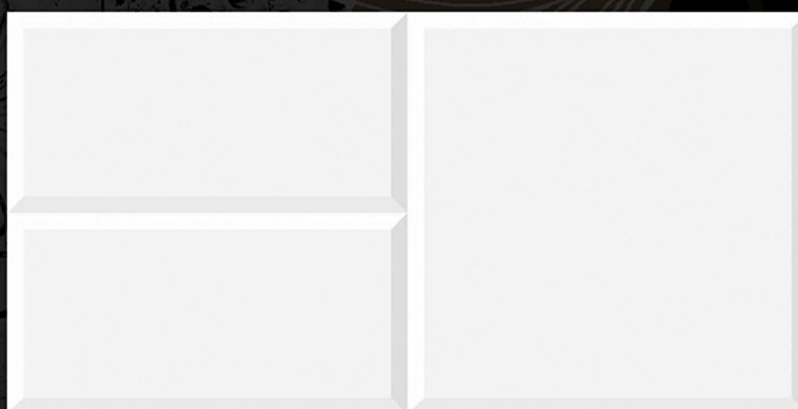


K_111_LT

GLOSSY SERIES


300x600mm

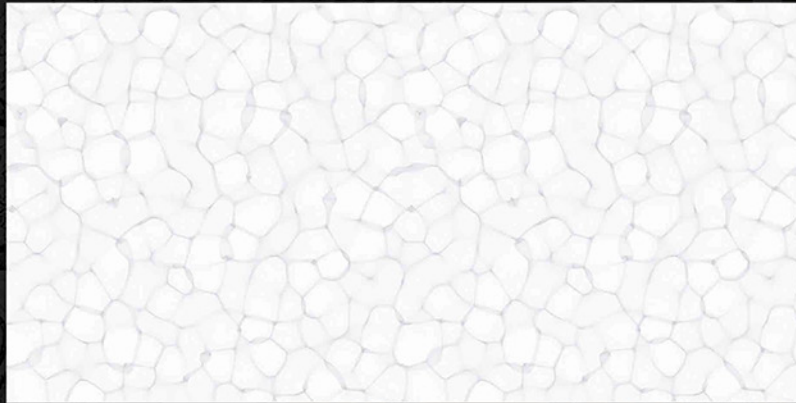


K_112_L

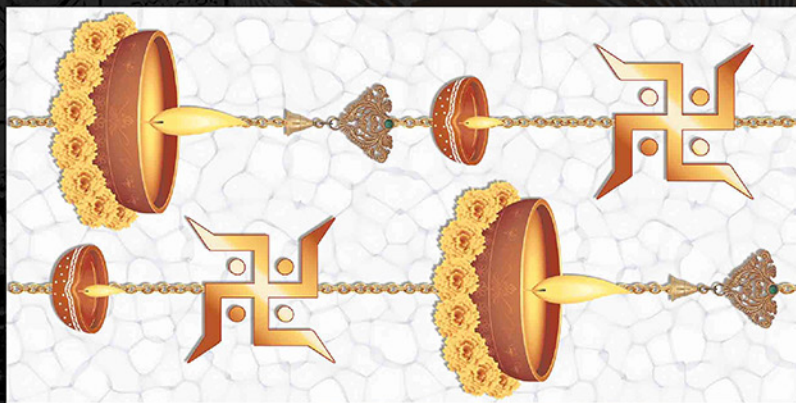

K_112_HL_1

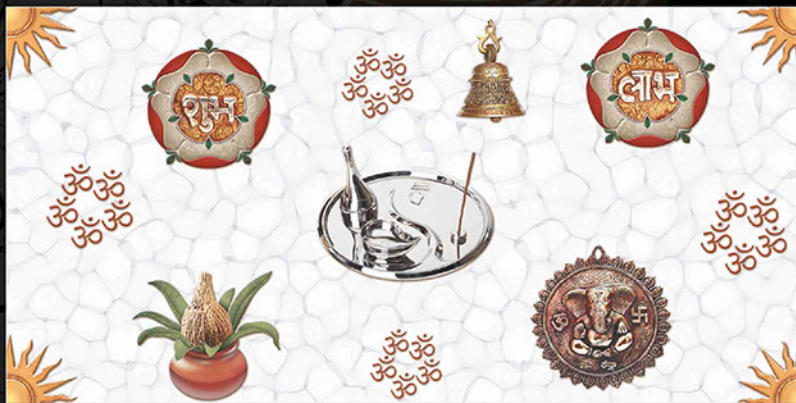


K_112_HL_2

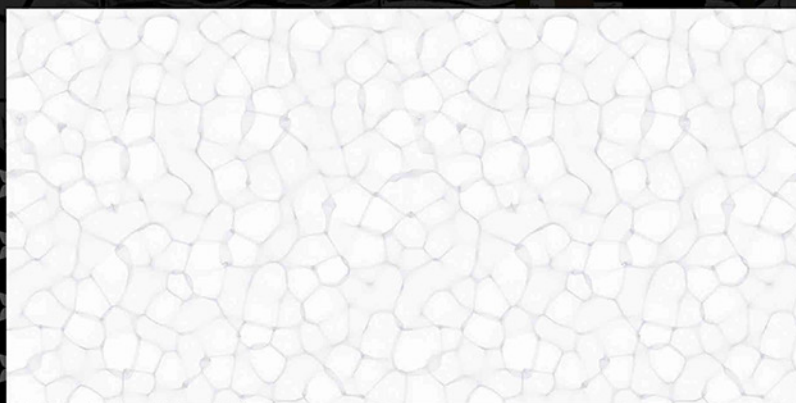

K_112_L

GLOSSY SERIES

300x600mm

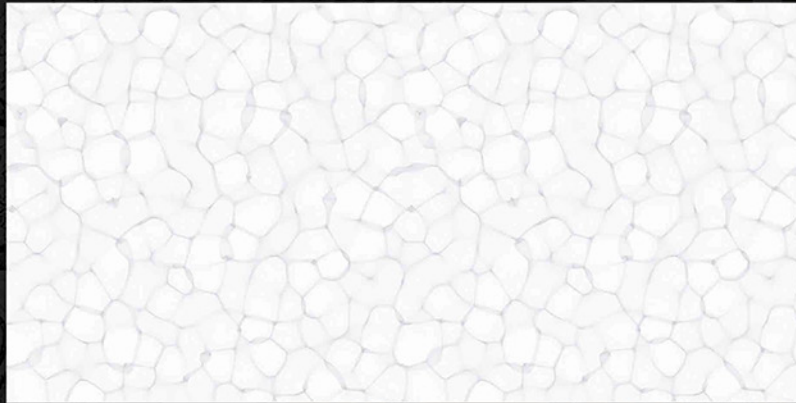


K_112_L



K_112_HL_3



K_112_HL_4

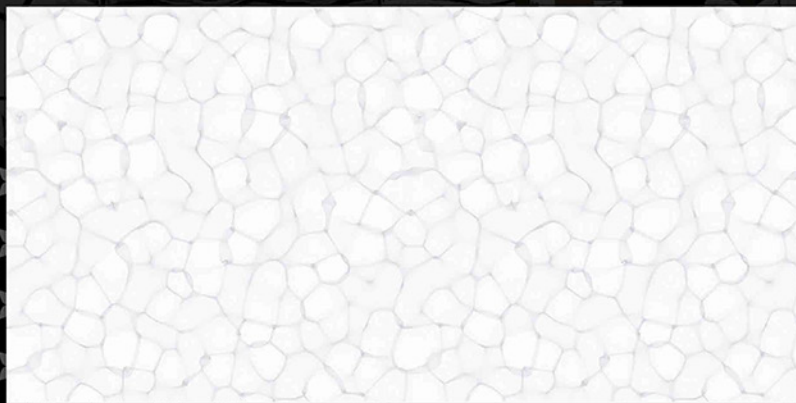

K_112_L

GLOSSY SERIES

300x600mm



K_113_L



K_113_HL_1



K_113_HL_2



K_113_L

GLOSSY SERIES

300x600mm



K_113_L



K_113_HL_3



K_113_HL_4



K_113_L

MATT SERIES

300x600mm



K_113_L



K_113_HL_5



K_113_L

CHARACTERISTICS	EUROSTANDARDS EN	SONIC VALUE			
DIMENSION & SURFACE QUALITY					
1. Dimension & Surface Quality	0.5%	0.4%			
2. Deviation in Thickness	0.6mm	0.5mm			
3. Straightness of Sides	0.3%	0.2%			
4. Rectangularity	0.5%	0.3%			
5. Surface Flatness	0.5%	0.5%			
6. Surface Quality	Min. 95%	Min. 96%			
PHYSICAL PROPERTIES					
1. Water Absorption	>10%	12-18%			
2. Bending Strength	>150 kg./Cm. ²	150 kg./Cm. ²			
3. Scratch Hardness (mohs scale)	Min 3	Min 3			
4. crazing Resistance	1 Cycle	No Crazing Upto 4 Cycles			
5. Relevent Group	B III	B III			
6. Type of Tiles	-	Dust Press Wall Tiles			
CHEMICAL PROPERTIES					
1. Staining Resistance	Min class 2	Resistant To all Acids and Alkalis & Household Chemicals except Hydro Flouric Acid			
2. Household Chemical	Min class B				
THERMAL PROPERTIES					
1. Thermal Shock Resistance	Resistant 10 Cycles	CONFORMS			
2. Thermal Expansion	9x10 ⁻⁶ k ⁻¹ Max	CONFORMS			
Packing Details					
Dimension in mm	Thickness in mm.	Tiles Per Box (Pcs)	Area Converage Per Box (Sq. Mtr.)	Area Weight per box (kg.) Approx	
300x600	9 (Approx.)	5	0.90	9.68	14.5kg.
300x300 Floor	9 (Approx.)	9	0.81	8.71	11.5kg.